




**ALEXI PLASTWOOD**

**The Combination of being durable and affordable**

Floors held high  
internationally!

*Creating*

an aura  
beyond boundaries

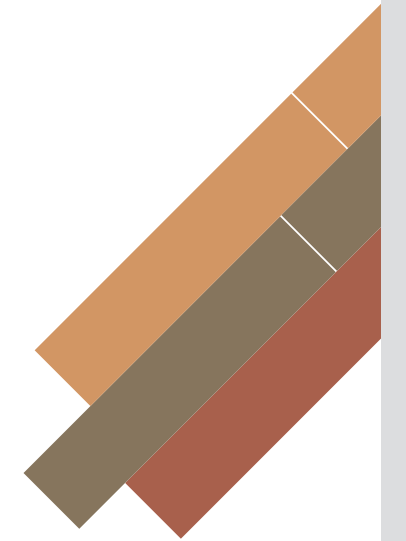

## About


# Glatt Floor

Glatt Floor truly dares to say no formaldehyde, owing to the properties which make it waterproof, wear-resistant and silent. It is a disruptive innovation in the flooring industry, which has perfectly synchronized designs in the whole world with beautiful visual effects. We assure that this perfect flooring option will be a popular choice in the flooring market.

A versatile wood and stone range fascinates with its outstanding appearance and cutting edge designs! Not just smart looks, these floors are durable and highly resistant to wear and tear. It doesn't crack or form indentations with proper care and maintenance. The functionality of these luxury vinyl flooring is truly captivating and will surely get you floored with its superior features and in turn enhance your lifestyle!




Vital finesse captured in  
*premium  
surfaces*

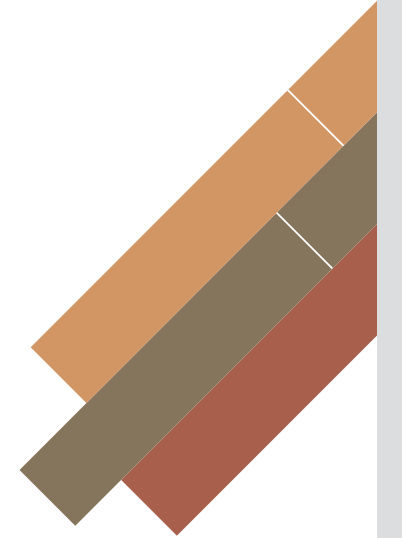

## About SPC Flooring

SPC rigid core flooring combines the strength of stone and the beauty of wood; an all for one solution for your home decoration. SPC flooring is constructed by UV coating, Wear layer, SPC print layer, SPC core and Balanced layer. For the backing, EVA, IXPE foam or Cork wood are available as options. Its advantages include good dimensional stability, high peel strength, almost no noise when walking, no warping, no distortion, 100% waterproof, heat and sound insulation, eco-friendly rigid floor and zero harmful emissions.

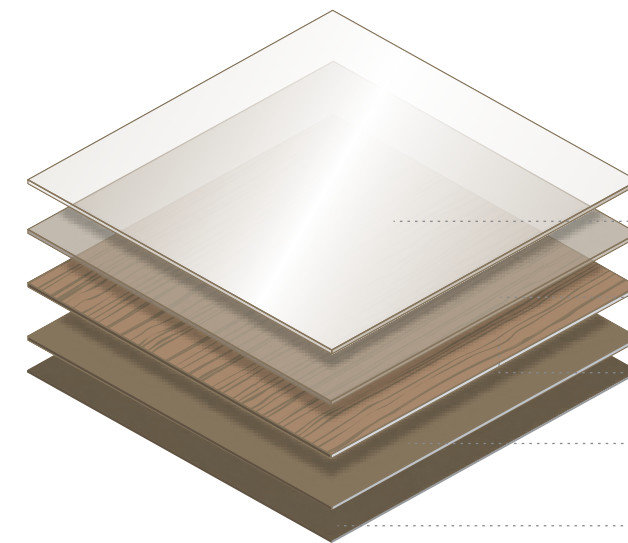

### Multi-layer construction

- UV coating
- Wear layer
- PVC Print Layer
- PVC base/ backing
- 1mm underlay built in

# The unique features of SPC flooring are enumerated as under:

## ECO-FRIENDLY

SPC flooring is mainly made with calcium powder, resin and a kind of stabilizer, which is 100% environmental protection floor without any hazardous substance, like heavy metal or formaldehyde. It is stone plastic composite, so it's formaldehyde free.




## SPEED OF INSTALLATION

Adopting a quick locking system, with quick installation, save time and cost without glue. Tight and even interlock technology avoids crash of edges and water leakage; it's an ideal choice for places requiring high ensemble effect. Additional benefit is it installs about 40% faster than traditional glue.



## WATERPROOF

SPC flooring contains vinyl resin, it has no appetency with water, and mildew will not occur due to high humidity. As it is water resistant, it is an ideal choice for residential use and can be used in bathrooms, kitchens, basement and laundry rooms.

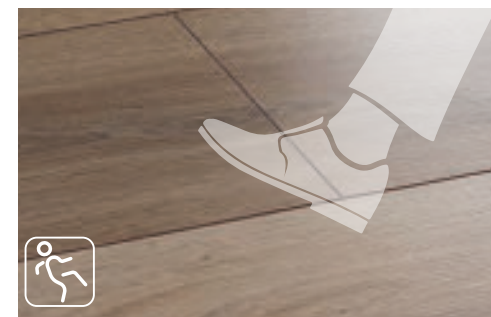

## ANTI-SKIDDING

The fine finish of Glatt floors with anti-slipping, safe and sturdy layering makes it the most sought after material. Anti-skid vitrified tiles last longer than other ceramic tiles due to their thickness and high resistance to water and stains. Sturdy and durable, the appearance remains intact over a period of time!




## STABILITY AND DURABILITY

The limestone core of SPC flooring has a higher density than the wood-like core of WPC flooring. This higher density is responsible for dimensional stability and protecting the floor from damage caused by temperature variations. This feature is also responsible for a greater resistance to scratches and indentations that could be caused by heavy furniture.



## VARIETY OF DESIGNS

With thousands of color patterns, wooden, stone & carpet design, it is suitable for different application areas.

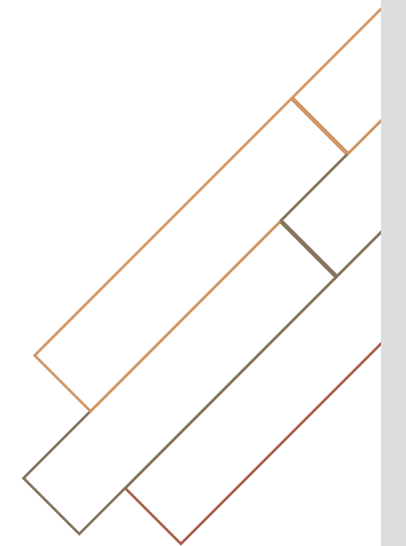

# FEATURES

FEATURES & BENEFITS



Lower Thickness & Weight



Extra Wide Planks



Impact Resistant



Easy to Clean Floor



Green Product



Dust free Installation



Flame Resistant



Scratch Resistant



Termite Resistant



Water Proof



Recyclable



Weather Proof



Stain Free



Easy to Carry



Modular



Glue Free



Less Dead Weight



Quick Installation



Mix & Match




Hassle Free Logistics

## Embossed in Register (EIR):

The extremely realistic appearance of Glatt Floor's luxury vinyl flooring is something we're very proud of. We are able to mimic the appearance and texture of beautiful natural wood and stone due to our innovative, EIR (Embossed-in-Register) technology, providing unparalleled realism and natural beauty that makes your flooring stand out. Enjoy the classic allure of hardwood, timeless marble and travertine, and top quality stone and slate for a fraction of the cost.

If you run your hand over the flooring, you'll notice something remarkable. You feel fine indentations that match the underlying photograph of a wood plank, similar to the grain of a plank cut from a tree. The embossing that creates the indentations must align perfectly with the image of the wood or stone in order to achieve this extremely realistic 3-dimensional appearance. This precise alignment is known as embossed-in-register (EIR). The embossed physical grain of the wear layer is married to the image film.

Every plank's unique, three-dimensional wood grain surface makes Glatt Floor the best choice for your home or business. You've got to feel it to believe it.

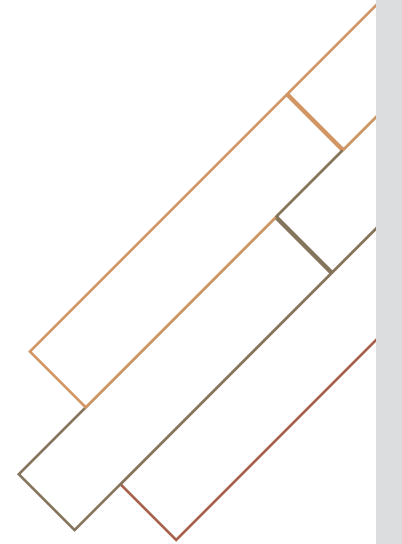

ACOUSTICAL ATTRIBUTES



AFFORDABLE



KID FRIENDLY



HYGIENIC



RESILIENT



DIVERSE DESIGNS



DURABLE



LOW MAINTENANCE



PET FRIENDLY



WATERPROOF

Marvin Natura | 2051




Marvin Natura | 2051

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Dark Natura | 2052



Dark Natura | 2052

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Almeria | 2053



Almeria | 2053

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Almeria Ash | 2054



Almeria Ash | 2054

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Coloroba Light | 2056



Coloroba Light | 2056

GLATT FLOOR PRODUCT DETAILS

<b>Wear layer option</b>	0.3 & 0.5 mm ( 12 mil & 20 mil)
<b>Finish Available</b>	Classic wood, Modern Oak, Rough hand scraped
<b>Sizes Available</b>	6\"/>
<b>Thickness</b>	4 mm to 8 mm
<b>Edge Profile</b>	Micro Bevel Edge & Painted Bevel Edges
<b>Construction</b>	Heterogeneous
<b>Attached Underlayment</b>	High density IXPE 1 mm
<b>Installation Method</b>	Uniclic / Unipush
<b>Color Shade</b>	Light

Coloroba Dark | 2055




Coloroba Dark | 2055

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark

Aged Fern | 2059



Aged Fern | 2059

GLATT FLOOR PRODUCT DETAILS

<b>Wear layer option</b>	0.3 & 0.5 mm ( 12 mil & 20 mil)
<b>Finish Available</b>	Classic wood, Modern Oak, Rough hand scraped
<b>Sizes Available</b>	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
<b>Thickness</b>	4 mm to 8 mm
<b>Edge Profile</b>	Micro Bevel Edge & Painted Bevel Edges
<b>Construction</b>	Heterogeneous
<b>Attached Underlayment</b>	High density IXPE 1 mm
<b>Installation Method</b>	Uniclic / Unipush
<b>Color Shade</b>	Dark



Classic Fern | 2057



Classic Fern | 2057

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Smoked Fern | 2058




Smoked Fern | 2058

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Accura Wenge | 2060



Accura Wenge | 2060

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Accura Grit | 2061



Accura Grit | 2061


GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium





Natural Timber | 2062



Natural Timber | 2062

GLATT FLOOR PRODUCT DETAILS

<b>Wear layer option</b>	0.3 & 0.5 mm ( 12 mil & 20 mil)
<b>Finish Available</b>	Classic wood, Modern Oak, Rough hand scraped
<b>Sizes Available</b>	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
<b>Thickness</b>	4 mm to 8 mm
<b>Edge Profile</b>	Micro Bevel Edge & Painted Bevel Edges
<b>Construction</b>	Heterogeneous
<b>Attached Underlayment</b>	High density IXPE 1 mm
<b>Installation Method</b>	Uniclic / Unipush
<b>Color Shade</b>	Medium



Regal Timber | 2063




Regal Timber | 2063

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Acacia Timber | 2064




Acacia Timber | 2064

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Alba Oakley | 2066




Alba Oakley | 2066

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Alda Oakley | 2065




Alda Oakley | 2065

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Millennial Bark | 2068




Millennial Bark | 2068

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Matured Bark | 2067



Matured Bark | 2067

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Brown Brisk | 2069



Brown Brisk | 2069

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Grey Brisk | 2070




Grey Brisk | 2070

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Donna Grove | 2072




Donna Grove | 2072

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Esta Grove | 2071




Esta Grove | 2071

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light



Stripped Pinewood | 2074




Stripped Pinewood | 2074

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Classic Plank | 2073



Classic Plank | 2073

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Rio Redwood | 2075



Rio Redwood | 2075

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark

Snowy Rigato | 2076



Snowy Rigato | 2076

GLATT FLOOR PRODUCT DETAILS

<b>Wear layer option</b>	0.3 & 0.5 mm ( 12 mil & 20 mil)
<b>Finish Available</b>	Classic wood, Modern Oak, Rough hand scraped
<b>Sizes Available</b>	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
<b>Thickness</b>	4 mm to 8 mm
<b>Edge Profile</b>	Micro Bevel Edge & Painted Bevel Edges
<b>Construction</b>	Heterogeneous
<b>Attached Underlayment</b>	High density IXPE 1 mm
<b>Installation Method</b>	Uniclic / Unipush
<b>Color Shade</b>	Light

Muscat Mark | 2077



Muscat Mark | 2077

GLATT FLOOR PRODUCT DETAILS

<b>Wear layer option</b>	0.3 & 0.5 mm ( 12 mil & 20 mil)
<b>Finish Available</b>	Classic wood, Modern Oak, Rough hand scraped
<b>Sizes Available</b>	6" x 36", 7.25" x 48", 9' x 60" 9' x 72"
<b>Thickness</b>	4 mm to 8 mm
<b>Edge Profile</b>	Micro Bevel Edge & Painted Bevel Edges
<b>Construction</b>	Heterogeneous
<b>Attached Underlayment</b>	High density IXPE 1 mm
<b>Installation Method</b>	Uniclic / Unipush
<b>Color Shade</b>	Medium





Choco Trench | 2078




Choco Trench | 2078

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6" x 36", 7.25" x 48", 9' x 60" 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Weathered Beech | 2079



Weathered Beech | 2079

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Classic wood, Modern Oak, Rough hand scraped
Sizes Available	6"x 36", 7.25"x 48", 9' x 60 " 9' x 72 "
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel Edge & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium



Statuario | 2080



Statuario | 2080

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12" x 24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light

Grey Pietra | 2081





Grey Pietra | 2081

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12" x 24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light

Galaxy Onyx | 2082

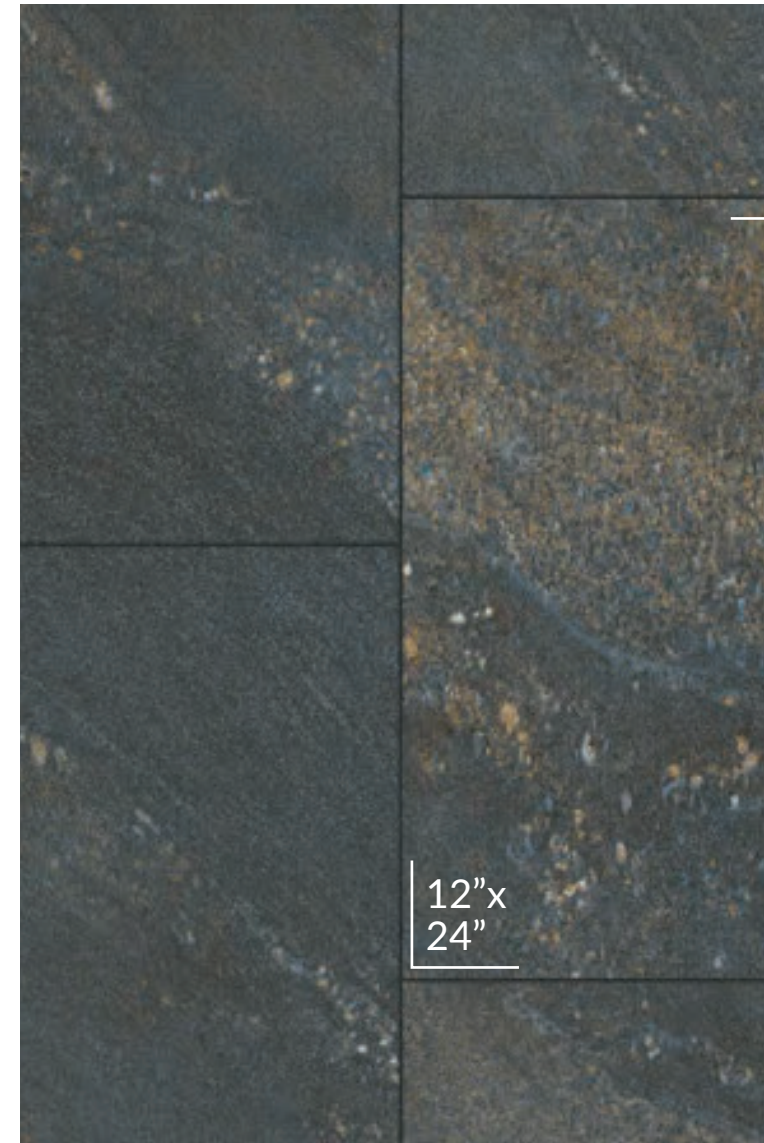

Galaxy Onyx | 2082

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12" x 24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Travertine Crema | 2083



Travertine Crema | 2083

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12" x 24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium

Travertine Grey | 2086




Travertine Grey | 2086

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12" x 24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Light




Armani Brown | 2087

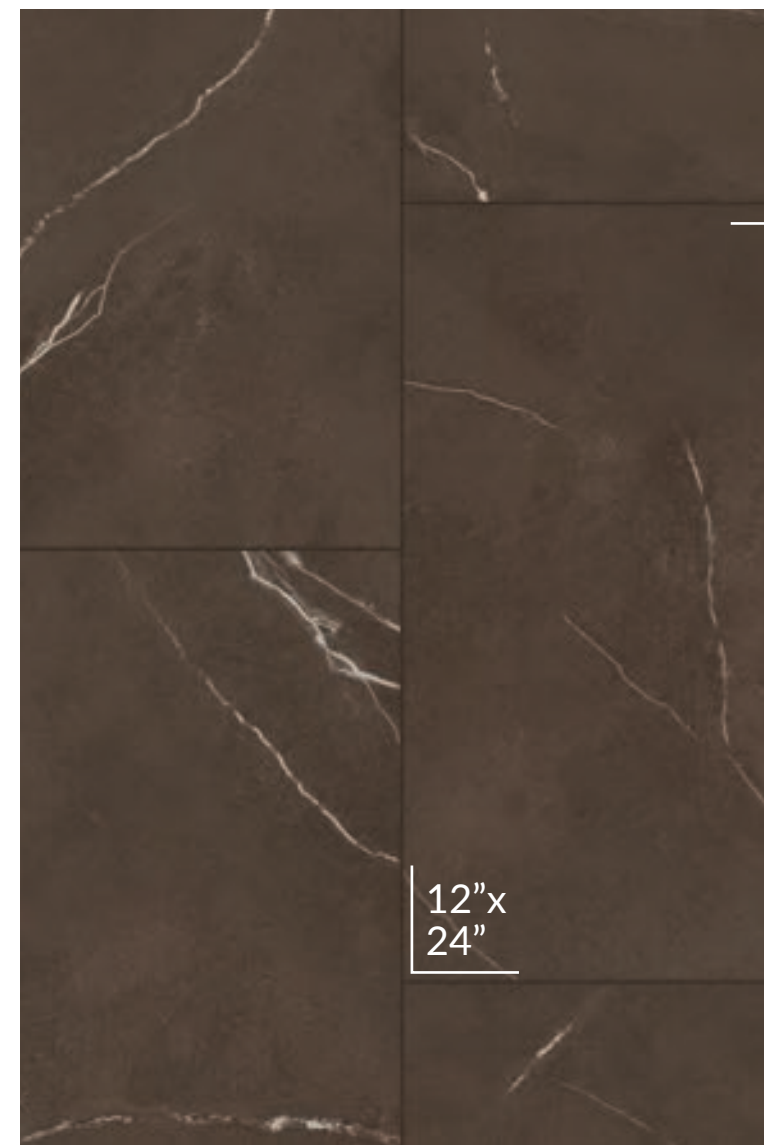

Armani Brown | 2087


GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12" x 24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark

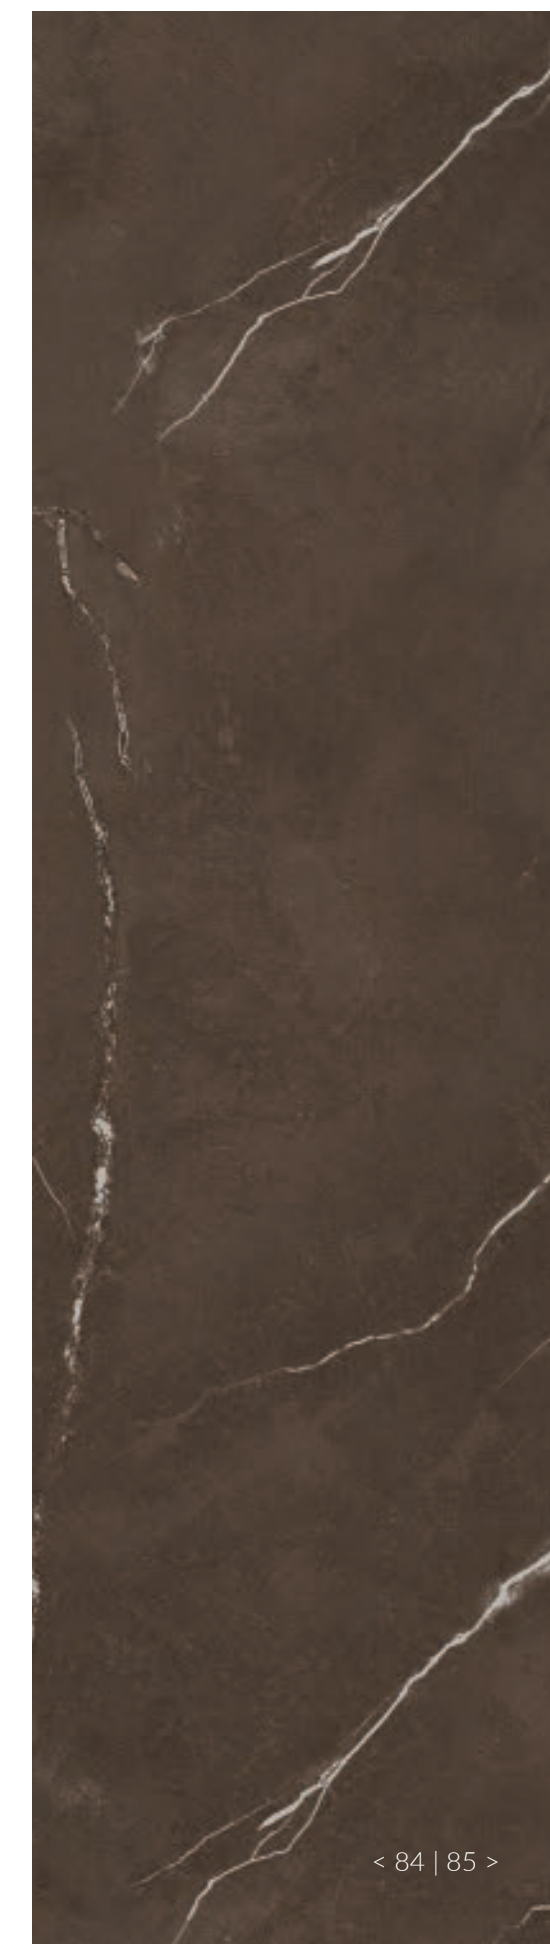



Armani Grey | 2084

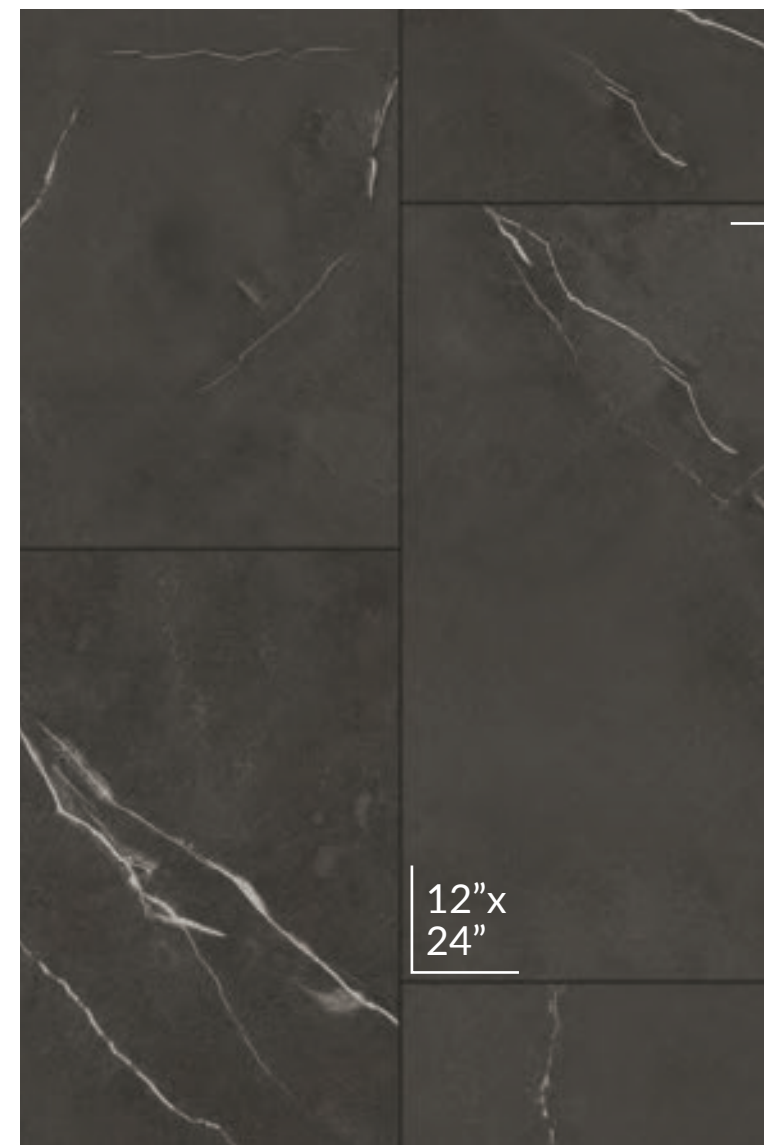

Armani Grey | 2084

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12" x 24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Dark



Armani White | 2085



Armani White | 2085

GLATT FLOOR PRODUCT DETAILS

Wear layer option	0.3 & 0.5 mm ( 12 mil & 20 mil)
Finish Available	Natural Stone Finish
Sizes Available	12" x 24"
Thickness	4 mm to 8 mm
Edge Profile	Micro Bevel & Painted Bevel Edges
Construction	Heterogeneous
Attached Underlayment	High density IXPE 1 mm
Installation Method	Uniclic / Unipush
Color Shade	Medium

# Glatt Floor Finishes



CLASSIC  
WOOD

MODERN  
OAK

NATURAL STONE  
FINISH







ROUGH HAND  
SCRAPED

# PERFORMANCE

Item	Unit	Test Methods	Spec	GLATT FLOOR SPC
Thickness	mm	ASTM F 386	±0.005"(0.13mm )	±0.005"(0.13mm )
Size	Width	ASTM F 2055	177.8 ± 0.23	177.8 ± 0.23
	Length		1219.2 ± 1.58	1219.2 ± 1.58
Squareness	mm	ASTM F 2055	Max. 0.01"(0.254mm )	≤ 0.2
Gloss level	-	60° Gloss Meter		5 - 8
Size	Width	ASTM F 2199-09	≤ 0.002"(0.165%)	≤ 0.1%
	Length		≤ 0.002"(0.165%)	≤ 0.1%
Size	23°C	mm		≤ 0.5mm
	-10°C x 2hr	mm		≤ 0.5mm
Core Density	-			1.95 ± 0.05
Contraction (-10°C, 2hr)	Width	-10°C x 2hr		≤ 0.2%
	Length			≤ 0.2%
Expansion (50°C, 4hr)	Width	50°C x 4hr		≤ 0.2%
	Length			≤ 0.2%
Indentation	%	ASTM F 1914	≤ 8%	≤ 5%
Resistance to Chemicals		ASTM F 925 (Resistance to Chemicals )	No more than slight change in surface dulling, surface attack, or staining	No more than slight change in surface dulling, surface attack, or staining
IIC		ASTM F 492-09	≥ 50	≥ 52
Static Load Limit		ASTM F 970	0.005"(0.13mm )	0.005"(0.13mm )


# PRODUCT APPLICATION







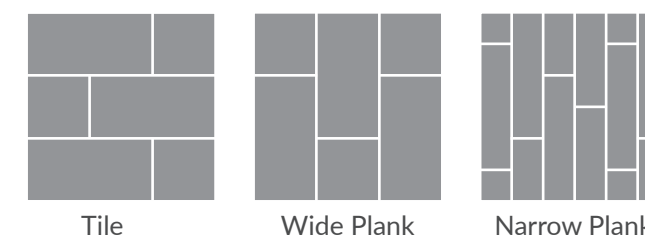


## INSTALLATION OF THE PRODUCT

- Place the B plate on plate A inclined, right into the filister locking, and then let it lay flat. 
- After laying it flat, place the B plate and C plate parallel to each other with spacing about 2-3 mm. 
- Lift up the plates A and B at the same time. (Note: They should be at a 45 degree angle to the ground.) 
- Push the B plate flat along the C plate direction, push until locked. 
- With the palm of your hands, flatten the plates A and B, but do not use force to press to the floor. 
- The floors should be smooth without slit after installation. If the floor are not smooth or have a slit, then they need to be lifted and locked at a 10 to 30 degree angle. After locking, the floor will be smooth automatically. 

# PRODUCT STRUCTURE

## Available in 3 styles



-  Waterproof core
-  Easy to cut
-  Hard wearing & durable
-  Foam backed
-  Slip resistant
-  Lighter to carry
-  RIGID PVC core
-  Reaction to fire tested
-  15 year domestic / 7 year commercial warranty